


LEDA QX120


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2 x 18V)

Power
Puissance
Potencia
2 x 10W

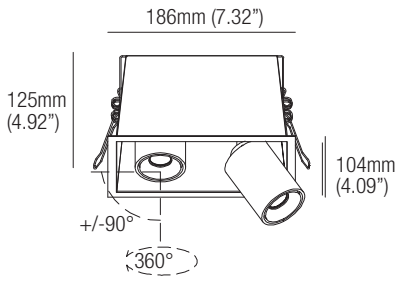

Photometric diagrams

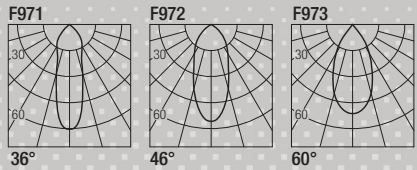

CCT	Flux _(x2)	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

LDQX12 | X | XX | 9 | X |


LDQX12	X Finishing Finitions Acabados	XX Color Temp. Température couleur Temperatura de color	9 Beam angle Angle de faisceau Ángulo del haz
	1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado	S 36° M 46° W 60°

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory

Static White Phase / 0-10V (Dual Dimming)



Dim to Warm Phase / 0-10V (Dual Dimming)



2 x L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

X03175
Mounting Plate
with 175x95mm Hole

MP-X175


Mounting Plate
with 175x95mm Hole

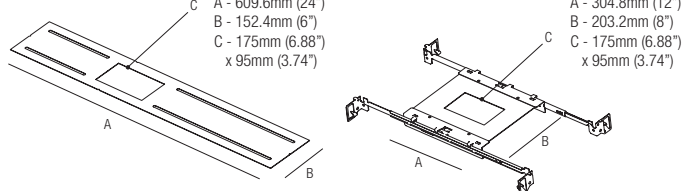

Optionals - Accessoires - Accesorios

DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W



IC Housings

IC127X03175

Recessed Box for
Insulated Ceiling
with 175x95mm Hole

AT127X03175

Air Tight Recessed
Box for Insulated
Ceiling with
175x95mm Hole

