


LEDA QX130

design: Lapo Grassellini


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 3 x 18V)

Power
 Pouissance
 Potencia
3 x 10W

FLEXALIGHTING
 NORTH AMERICA

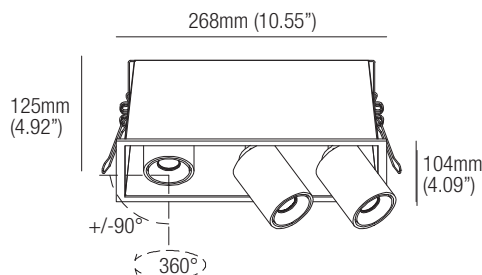

Photometric diagrams

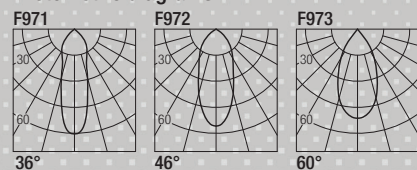

CCT	Flux _(x3)	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

LDQX13|X|XX|9|X|


LDQX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K		S	36°
		5 Black Noir Negro		27 2700K		M	46°
		C Custom Personnalisée Personalizado		30 3000K		W	60°
				35 3500K			
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1

3 x L001

Low luminance louvre


Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-X255


Mounting Plate
 with 255x95mm Hole



T-Bar Installation

X03255

Mounting Plate
 with 255x95mm Hole

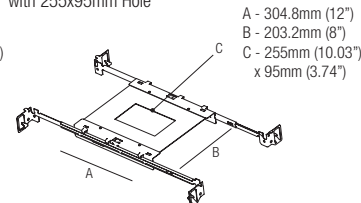


IC Housings

IC127X03255

Recessed Box for
 Insulated Ceiling
 with 255x95mm Hole

AT127X03255

Air Tight Recessed
 Box for Insulated
 Ceiling with
 255x95mm Hole



Optionals - Accessoires - Accesorios

3 x DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

