


LOLLO 10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W



Photometric diagrams

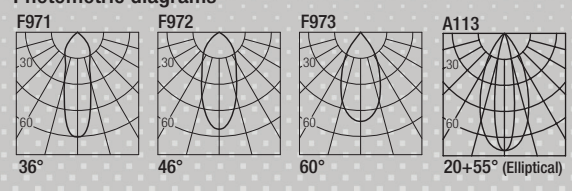

CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm	725 lm	95
2700K	921 lm	98+	1800K-3000K		
3000K	977 lm	98+	Tunable White	952 lm	95
3500K	1016 lm	98+	2700K-5000K		
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

LL1 | X | XX | 9 | X


LL1	X	Finishing	XX	Color Temp.	9	X	Beam angle
		Finitions Acabados		Température couleur Temperatura de color			Angle de faisceau Ángulo del haz
1	White Blanc Blanco	24	2400K	S	36°		
5	Black Noir Negro	27	2700K	M	46°		
C	Custom Personnalisée Personalizado	30	3000K	W	60°		
		35	3500K	D	20+55° (Elliptical)		
		40	4000K				
		DW	Dim Warm				
		TW	Tunable White				
		CU	Custom Personnalisée Personalizado				

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPRO10-A Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 3</td> </tr> </table>	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3		
Dim to Warm	Phase / 0-10V (Dual Dimming)		
400mA	<table border="1"> <tr> <td>CCPRO10-A Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 3</td> </tr> </table>	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3		
Turnable White	Phase / 0-10V (Dual Dimming)		
500mA	Please consult manufactory for driver option		

L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria

MP-Q070


Mounting Plate
with 70mm Hole



T-Bar Installation

Q01070

Mounting Plate
with 70mm Hole

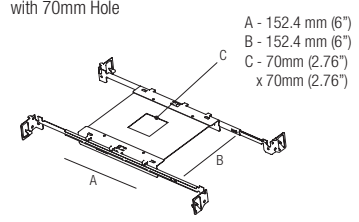


IC Housings

IC064Q01070

Recessed Box for
Insulated Ceiling
with 70mm Hole

AT064Q01070

Air Tight Recessed
Box for Insulated
Ceiling with
70mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

