


LOLLO 30

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
700mA (V_i 36V)

Power
Puissance
Potencia
30W

FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

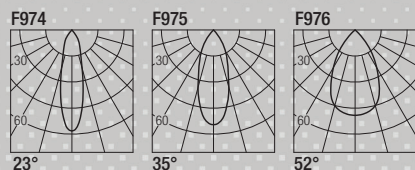

CCT	Flux	CRI
2700K	2380 lm	93
3000K	2560 lm	93
3500K	2645 lm	93
4000K	2730 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

LL3 | X | XX | 9 | X |


LL3	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 23°
		5 Black Noir Negro		30 3000K			M 35°
		C Custom Personnalisée Personalizado		35 3500K			W 52°
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory


Static White Phase / 0-10V (Dual Dimming)

700mA

CCPRO40-A
Min. 1
Max. 1

MP-Q115


Mounting Plate
with 115mm Hole



T-Bar Installation

Q02115

Mounting Plate
with 115mm Hole

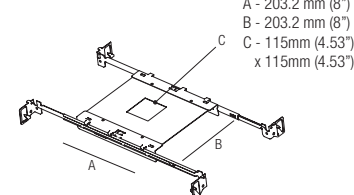

IC Housings

IC086Q02115

Recessed Box for
Insulated Ceiling
with 115mm Hole

AT086Q02115

Air Tight Recessed
Box for Insulated
Ceiling with
115mm Hole

