


LOLLO X120

design: Lapo Grassellini


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2 x 18V)

Power
 Pouissance
 Potencia
2 x 10W

FLEXALIGHTING
 NORTH AMERICA



Photometric diagrams

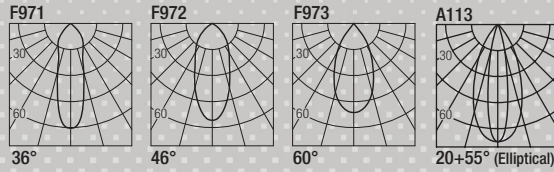

CCT	Flux _(x2)	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

LLX12 X XX 9 X


LLX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			S 36°
		5 Black Noir Negro		27 2700K			M 46°
		C Custom Personnalisée Personalizado		30 3000K			W 60°
				35 3500K			D 20+55° (Elliptical)
				40 4000K			
				DW Dim Warm			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White 500mA	Please consult factory for driver options

2 x L001

Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
 Note: le filtre doit être commandé en même temps que l'appareil
 Nota: el filtro debe pedirse junto con la luminaria



T-Bar Installation

X02135

Mounting Plate
 with 135x70mm Hole

MP-X135

Mounting Plate
 with 135x70mm Hole




IC Housings

IC086X02135

Recessed Box for
 Insulated Ceiling
 with 135x70mm Hole

AT086X02135

Air Tight Recessed
 Box for Insulated
 Ceiling with
 135x70mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.2

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 26W

