


LOLLO X130

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 3 x 18V)

Power
Puissance
Potencia
3 x 10W

FLEXALIGHTING
NORTH AMERICA

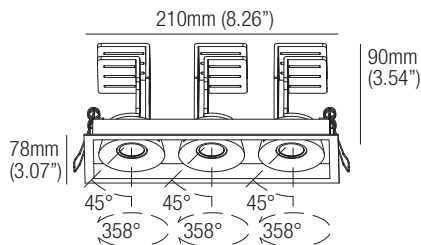

Photometric diagrams

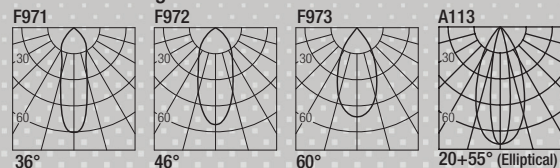

CCT	Flux _(x3)	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

LLX13|X|XX|9|X|


LLX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			S 36°
		5 Black Noir Negro		27 2700K			M 46°
		C Custom Personnalisée Personalizado		30 3000K			W 60°
				35 3500K			D 20+55° (Elliptical)
				40 4000K			
				DW Dim Warm			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A x3 Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 1
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A x3 Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 1
Turnable White 500mA	Please consult factory for driver options

3 x L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-X200


Mounting Plate
with 200x70mm Hole



T-Bar Installation

X03200

Mounting Plate
with 200x70mm Hole

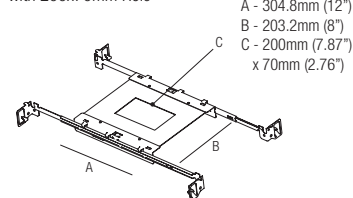


IC Housings

IC127X03200

Recessed Box for
Insulated Ceiling
with 200x70mm Hole

AT127X03200

Air Tight Recessed
Box for Insulated
Ceiling with
200x70mm Hole



Optionals - Accessoires - Accesorios

3 x DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

