


# LOLLO X220


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V<sub>f</sub> 2 x 36V)

**Power**  
Puissance  
Potencia  
**2 x 20W**

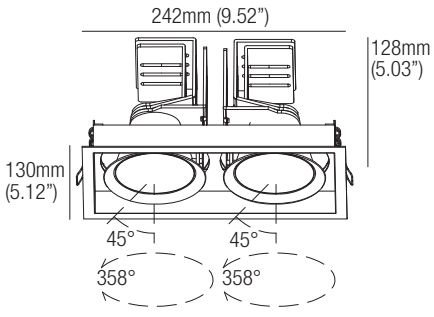

## Photometric diagrams

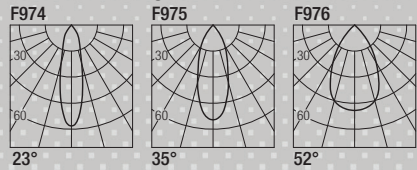

CCT	Flux <sub>(2)</sub>	CRI
2700K	1700 lm	93
3000K	1830 lm	93
3500K	1890 lm	93
4000K	1950 lm	93

## Code Construction

Construction du code produit  
Construcción del código de producto

LLX22 | X | XX | 9 | X |

<b>LLX22</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<p><b>1</b> White Blanc Blanco</p> <p><b>5</b> Black Noir Negro</p> <p><b>C</b> Custom Personnalisée Personalizado</p>		<p><b>27</b> 2700K</p> <p><b>30</b> 3000K</p> <p><b>35</b> 3500K</p> <p><b>40</b> 4000K</p> <p><b>CU</b> Custom Personnalisée Personalizado</p>			<p><b>S</b> 23°</p> <p><b>M</b> 35°</p> <p><b>W</b> 52°</p>

## Drivers (Remote)

Alimentateurs  
Alimentadores


Static White Phase / 0-10V (Dual Dimming)

500mA

CCPR040-A x2  
Min. 1  
Max. 1

## Series wiring

Câblage en série  
Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory

## T-Bar Installation


X03230

Mounting Plate with 230x120mm Hole

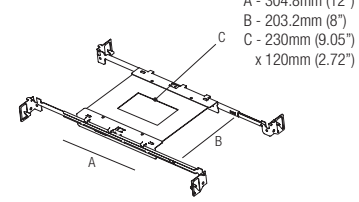

MP-X230


Mounting Plate with 230x120mm Hole

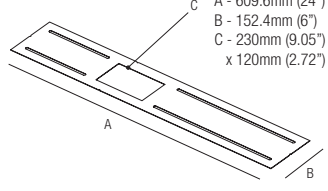

## Optionals - Accessoires - Accesorios

2 x DCVI.B.2

24VDC Constant Voltage to Constant Current Converter  
0-10V / Phase / Dim to Warm Compatible, 26W



## IC Housings

IC127X03230

Recessed Box for Insulated Ceiling with 230x120mm Hole

AT127X03230

Air Tight Recessed Box for Insulated Ceiling with 230x120mm Hole

