
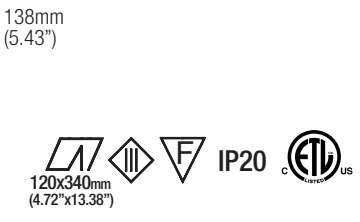


# LOLLO X330


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**700mA (V, 3 x 36V)**

**Power**  
Puissance  
Potencia  
**3 x 30W**

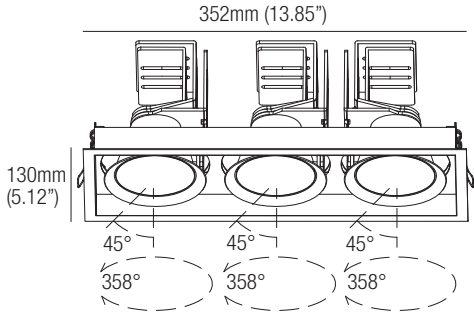

## Photometric diagrams

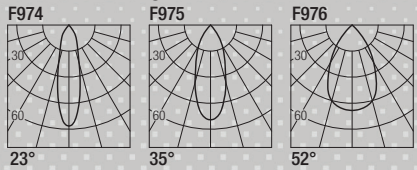

CCT	Flux <sub>(x3)</sub>	CRI
2700K	2380 lm	93
3000K	2560 lm	93
3500K	2645 lm	93
4000K	2730 lm	93

## Code Construction

Construction du code produit  
Construcción del código de producto

LLX33|X|XX|9|X|

<b>LLX33</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<p><b>1</b> White Blanc Blanco</p> <p><b>5</b> Black Noir Negro</p> <p><b>C</b> Custom Personnalisée Personalizado</p>		<p><b>27</b> 2700K</p> <p><b>30</b> 3000K</p> <p><b>35</b> 3500K</p> <p><b>40</b> 4000K</p> <p><b>CU</b> Custom Personnalisée Personalizado</p>			<p><b>S</b> 23°</p> <p><b>M</b> 35°</p> <p><b>W</b> 52°</p>


## Drivers (Remote)

Alimentateurs  
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)
700mA	
	CCPRO40-A x3 Min. 1 Max. 1

## Series wiring


Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

## MP-X340


Mounting Plate with 340x120mm Hole

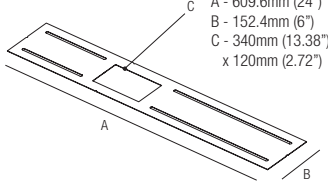

## T-Bar Installation

### XO4340

Mounting Plate with 340x120mm Hole

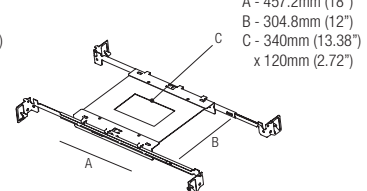

## IC Housings

### IC181XO4340

Recessed Box for Insulated Ceiling with 340x120mm Hole

### AT181XO4340

Air Tight Recessed Box for Insulated Ceiling with 340x120mm Hole

