


LOREN 10

design: Lapo Grassellini




Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)

Power
 Pouissance
 Potencia
10W




FLEXALIGHTING

NORTH AMERICA

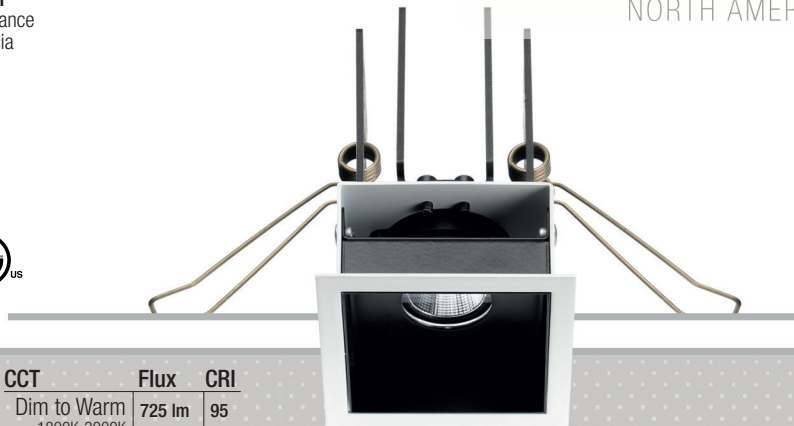

Photometric diagrams

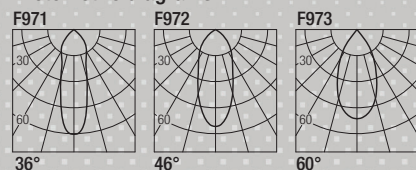

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

LR1 | X | XX | 9 | X |


LR1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			S 36°
		5 Black Noir Negro		27 2700K			M 46°
		C Custom Personnalisée Personalizado		30 3000K			W 60°
				35 3500K			
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White Phase / 0-10V (Dual Dimming)


500mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
-------	-------------------------------	-------------------------------

Dim to Warm Phase / 0-10V (Dual Dimming)

400mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
-------	-------------------------------	-------------------------------

MP-Q058


Mounting Plate
 with 58mm Hole



T-Bar Installation

Q01058

Mounting Plate
 with 58mm Hole




IC Housings

IC064Q01058

Recessed Box for
 Insulated Ceiling
 with 58mm Hole

AT064Q01058

Air Tight Recessed
 Box for Insulated
 Ceiling with
 58mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

