



IP RATED DOWNLIGHTS


LOTUS 2

design: Roberto Mantovani


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2.9V)

Power
Pouissance
Potencia
1.5W

FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

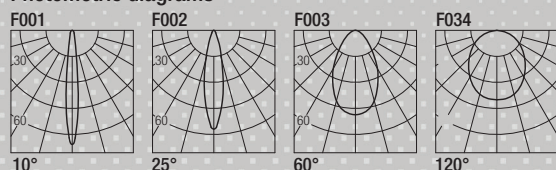

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

LT1 | X | X | XX | X


LT1	X	Shape Forma Forme	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados
		1 Round Rond Redondo		0 10°		27 2700K		B White Blanc Blanco
		2 Square Carré Cuadrado		1 25°		30 3000K		N Black Noir Negro
				2 60°		35 3500K		K COR-TEN
				9 120°		40 4000K		Z INOX AISI 316L Steel Acier Acero
						CU Custom Personnalisée Personalizado		C Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 6
	CCPR040-A Min. 1 Max. 18

L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040


Mounting Plate
with 40mm Hole



T-Bar Installation

R01040


Mounting Plate
with 40mm Hole

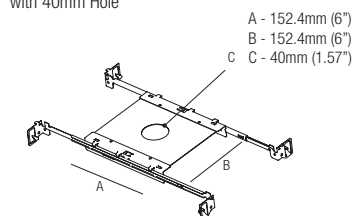

IC Housings

IC064R01040
Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064R01040
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios

CSXT01

Recessing box
Boîtier d'encastrement
Caja de empotrar

