




IP RATED DOWNLIGHTS

LOTUS 6


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Puissance
Potencia
4.5W



Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2400K	472 lm	95+	Dim to Warm	416 lm	90
2700K	421 lm	98+	1800K-3000K		
3000K	446 lm	98+			
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

LT2 | X | X | XX | X | E


LT2	X	Shape Forma Forme	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados	E
		1 Round Rond Redondo		1 25°		24 2400K		B White Blanc Blanco	
		2 Square Carré Cuadrado		2 45°		27 2700K		N Black Noir Negro	
						30 3000K		K COR-TEN	
						35 3500K			
						40 4000K			
						DW Dim Warm			
						CU Custom Personnalisée Personalizado		Z INOX AISI 316L Steel Acier Acero	
								C Custom Personnalisée Personalizado	

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 3

L001

Low luminance louvre


Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040


Mounting Plate
with 40mm Hole



T-Bar Installation

R01040

Mounting Plate
with 40mm Hole

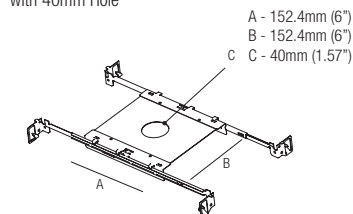


IC Housings

IC064R01040

Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064R01040


Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



Optionals - Accessoires - Accesorios

CSXT01

Recessing boot
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

