


MAHALO

design: Roberto Mantovani




Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Pouissance
Potencia
7.5W

FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

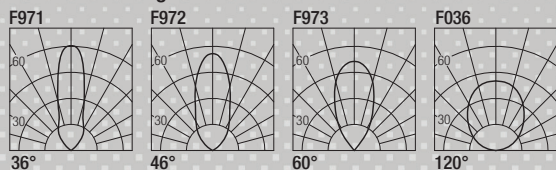

CCT	Flux	CRI
2400K	560 lm	95+
2700K	580 lm	98+
3000K	610 lm	98+
3500K	625 lm	98+
4000K	640 lm	98+

Code Construction

Construction du code produit
Construcción del código de producto

MH1 | X | XX | 9 | X


MH1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		2 Aluminum Aluminium Aluminio		24 2400K			S 36°
		5 Black Noir Negro		27 2700K			M 46°
		6 Bronze Bronze		30 3000K			W 60°
		C Custom Personnalisée Personalizado		35 3500K			X 120°
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White

0-10V/Phase

DLM.100
Min. 1
Max. 12
DLM.60
Min. 1
Max. 7
DLM.30
Min. 1
Max. 3

LOD1

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Note: cable cut to measure on request

Note: câble sur mesure disponible sur demande


Nota: cable a medida disponible a petición

Optionals - Accessoires - Accesorios

CP0022

Earth spike

Piquet de terre
Pico de la tierra



XNTX202

Aluminum
Aluminium
Aluminio

XNTX205

Black
Noir
Negro

XNTX206

Bronze
Bronce

Antiglare Snoot

