

MILO 10



design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA

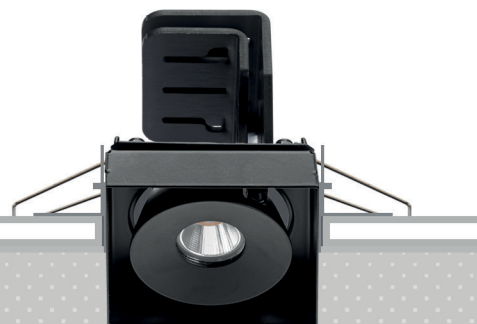

Photometric diagrams

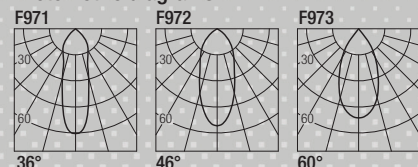

CCT	Flux	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

ML1 | X | XX | 9 | X |


ML1	X	Finishing	XX	Color Temp.	9	X	Beam angle
		Finitions		Température couleur			Angle de faisceau
		Acabados		Temperatura de color			Ángulo del haz
		1 White		27 2700K		S	36°
		Blanc		30 3000K		M	46°
		Blanco		35 3500K		W	60°
		5 Black		40 4000K		D	20+55°
		Noir		DW Dim Warm			(Elliptical)
		Negro		CU Custom			
		C Custom		Personalisée			
		Personalizado		Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

L001

Low luminance louvre


Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
 Note: le filtre doit être commandé en même temps que l'appareil
 Nota: el filtro debe pedirse junto con la luminaria

MP-Q077


Mounting Plate
 with 77mm Hole



T-Bar Installation

Q01077


Mounting Plate
 with 77mm Hole

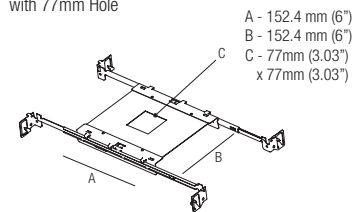

IC Housings

IC064Q01077
 Recessed Box for
 Insulated Ceiling
 with 77mm Hole

AT064Q01077
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 77mm Hole




Accessories - Accessoires - Accesorios

MLX11Q

Plasterboard recessing frame

Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso




Hole Cut:
 77mm
 (3.03")

MLX11Q.WF

Backmount frame

Pierre/bois montage arrière
 Roca/madera montaje trasero



Hole Cut:
 77mm
 (3.03")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

