



TRIMLESS DOWNLIGHTS


MILO X120

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2 x 18V)

Power
Pouissance
Potencia
2 x 10W

FLEXALIGHTING
NORTH AMERICA

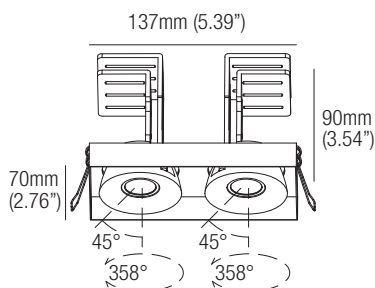

Photometric diagrams

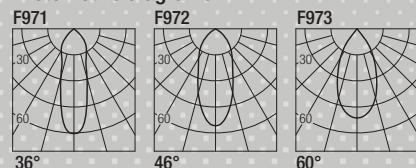

CCT	Flux _(x2)	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

MLX12 | X | XX | 9 | X |


MLX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		S 36°	
		5 Black Noir Negro		30 3000K		M 46°	
		C Custom Personnalisée Personalizado		35 3500K		W 60°	
				40 4000K		D 20+55° (Elliptical)	
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x2 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

2 x L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-X144


Mounting Plate
with 144x77mm Hole



T-Bar Installation

XO2144

Mounting Plate
with 144x77mm Hole

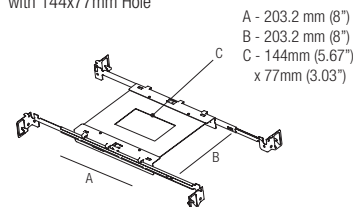


IC Housings

IC086XO2144

Recessed Box for
Insulated Ceiling
with 144x77mm Hole

AT086XO2144


Air Tight Recessed
Box for Insulated
Ceiling with
144x77mm Hole



Accessories - Accessoires - Accesorios

MLX12Q


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
77mm x 144mm
(3.03" x 5.67")

MLX12Q.WF

Backmount frame
Boîtier/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
77mm x 144mm
(3.03" x 5.67")

Optionals - Accessoires - Accesorios

DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W

