
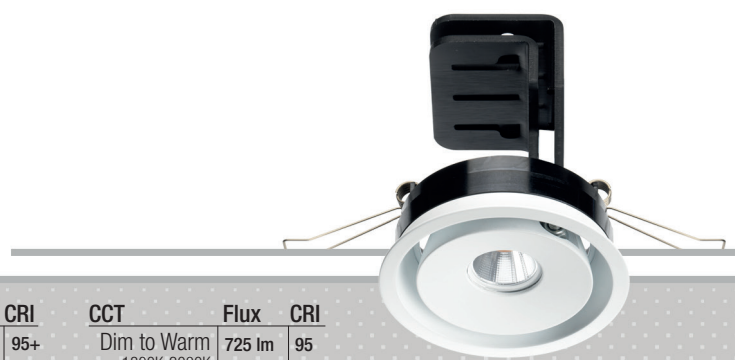


MINE 10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

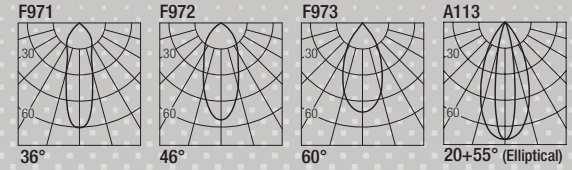

CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+	Tunable White 2700K-5000K	952 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

MN1 | X | XX | 9 | X


MN1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco	24	2400K		S	36°
	5	Black Noir Negro	27	2700K		M	46°
	C	Custom Personnalisée Personalizado	30	3000K		W	60°
			35	3500K		D	20+55° (Elliptical)
			40	4000K			
			DW	Dim Warm			
			TW	Tunable White			
			CU	Custom Personnalisée Personalizado			

Drivers (Remote)


Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

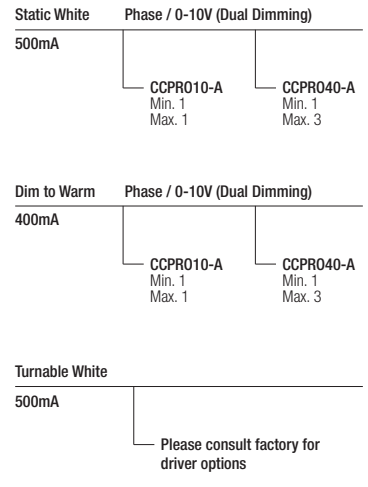

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria


Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




MP-R070
Mounting Plate
with 70mm Hole



T-Bar Installation

RO1070
Mounting Plate
with 70mm Hole

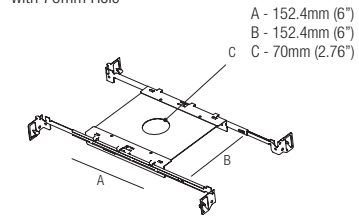

IC Housings

IC064R01070
Recessed Box for Insulated Ceiling with 70mm Hole

AT064R01070
Air Tight Recessed Box for Insulated Ceiling with 70mm Hole

