


MINISASHA 130 DISPLAY

design: Lapo Grassellini

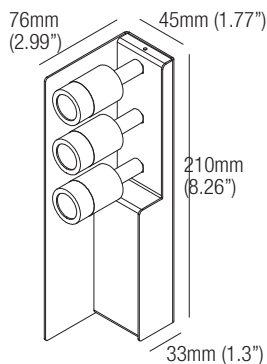


Supply current
 Courant d'alimentation
 Corriente de alimentación
350mA (V_i 3 x 8.7V)

Power
 Pouissance
 Potencia
3 x 3W



Photometric diagrams



GCT	Flux _{x3}	CRI
2700K	267 lm	98+
3000K	279 lm	98+
3500K	292 lm	98+
4000K	309 lm	98+



Code Construction

Construction du code produit
 Construcción del código de producto

MSD13 | X | X | XX |


MSD13	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
	1	White Blanc Blanco	1	18°	27	2700K
	5	Black Noir Negro	2	40°	30	3000K
	C	Custom Personnalisée Personalizado			35	3500K
					42	4200K
					CU	Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
350mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 2

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

