


NONE Q10

design: Roberto Mantovani


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Puissance
Potencia
10W



Photometric diagrams

F001



CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Tunable White	952 lm	95
2700K	921 lm	98+	2700K-5000K		
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

NQW X XX 9 1


NQW	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	1	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			1 10°
		5 Black Noir Negro		27 2700K			
		C Custom Personnalisée Personalizado		30 3000K			
				35 3500K			
				40 4000K			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)


500mA	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
-------	-------------------------------	-------------------------------

Turnable White

500mA	Please consult factory for driver options
-------	--

MP-Q080


Mounting Plate
with 80mm Hole



T-Bar Installation

Q02080

Mounting Plate
with 80mm Hole

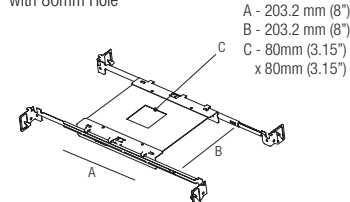


IC Housings

IC086Q02080

Recessed Box for
Insulated Ceiling with
80mm Hole

AT086Q02080

Air Tight Recessed Box
for Insulated Ceiling with
80mm Hole




Accessories - Accessoires - Accesorios

ZQC004

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
80mm (3.15")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

