


NONE R10


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Tunable White	952 lm	95
2700K	921 lm	98+	2700K-5000K		
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

NRW | X | XX | 9 | 1


NRW	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	1	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			1 10°
		5 Black Noir Negro		27 2700K			
		C Custom Personnalisée Personalizado		30 3000K			
				35 3500K			
				40 4000K			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring


Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory


Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

MP-R070
Mounting Plate
with 70mm Hole



T-Bar Installation


R01070
Mounting Plate
with 70mm Hole

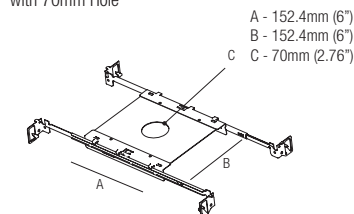

IC Housings

IC064R01070
Recessed Box for
Insulated Ceiling
with 70mm Hole

AT064R01070
Air Tight Recessed
Box for Insulated
Ceiling with
70mm Hole




Accessories - Accessoires - Accesorios

ZQC003

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso




Hole Cut:
70mm
(2.76")

ZQC003.BMK

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
70mm
(2.76")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

