


NONE R2

design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 2.9V)

Power
 Pouissance
 Potencia
1.5W



Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto

NRS X XX 5


NRS	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	5	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K		5 5°
		5 Black Noir Negro		30 3000K		
				35 3500K		
				40 4000K		
		C Custom Personnalisée Personalizado		CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White

500mA


Phase / 0-10V (Dual Dimming)

CCPRO10-A
 Min. 1
 Max. 6

CCPRO40-A
 Min. 1
 Max. 18

MP-R045


Mounting Plate
 with 45mm Hole



T-Bar Installation

R01045

Mounting Plate
 with 45mm Hole

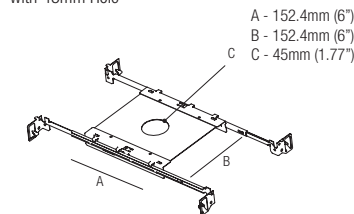


IC Housings

IC064R01045

Recessed Box for
 Insulated Ceiling
 with 45mm Hole

AT064R01045

Air Tight Recessed
 Box for Insulated
 Ceiling with
 45mm Hole




Accessories - Accessoires - Accesorios

ZQC001

Plasterboard recessing frame

Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso




Hole Cut:
 45mm
 (1.77 inches)

ZQC001.BMK

Backmount frame

Pierre/bois montage arrière
 Roca/madera montaje trasero



Hole Cut:
 34mm
 (1.34 inches)