


RAÙL 10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W

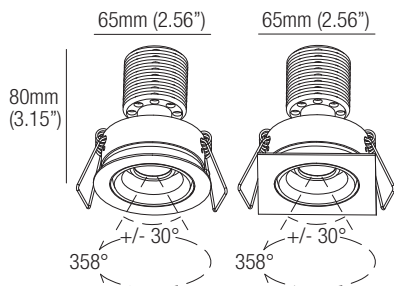

Photometric diagrams

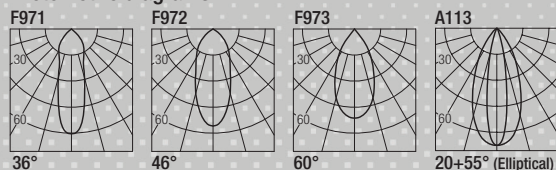

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

R1 | X | X | XX | 9 | X


R1	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		1 White Blanc Blanco		27 2700K		S	36°
		2 Square Carré Cuadrado		5 Black Noir Negro		30 3000K		M	46°
				C Custom Personnalisée Personalizado		35 3500K		W	60°
						40 4000K		D	20+55° (Elliptical)
						DW Dim Warm			
						CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPRO10-A Min. 1 Max. 1
	CCPRO40-A Min. 1 Max. 3
Turnable White 500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

LOH1
White
Blanc
Blanco

LOH1G
Grey
Gris

LOH1B
Black
Noir
Negro


LOH1C
Custom
Personnalisée
Personalizado



Optionals - Accessoires - Accesorios


DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



MP-R060


Mounting Plate
with 60mm Hole



T-Bar Installation

R01060

Mounting Plate
with 60mm Hole



IC Housings

IC064R01060
Recessed Box for
Insulated Ceiling
with 60mm Hole

AT064R01060
Air Tight Recessed
Box for Insulated
Ceiling with
60mm Hole

