


RAÛL 10 TRIMLESS


design: Lapo Grassellini




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V, 18V)

Power
Puissance
Potencia
10W

FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

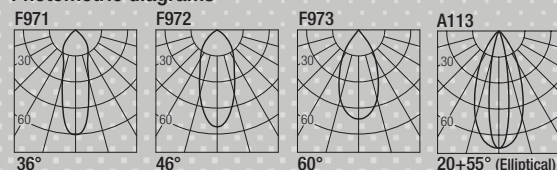

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

RT1 X XX 9 X


RT1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Turnable White 500mA	Please consult factory for driver options

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia


LOH1
White
Blanc
Blanco

LOH1B
Black
Noir
Negro

LOH1C
Custom
Personnalisée
Personalizado




MP-R090
Mounting Plate
with 90mm Hole



T-Bar Installation


R01090
Mounting Plate
with 90mm Hole

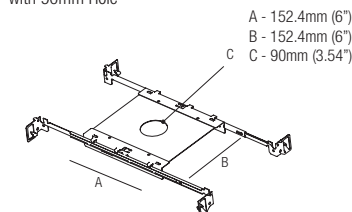

IC Housings

IC064R01090
Recessed Box for
Insulated Ceiling
with 90mm Hole


AT064R01090
Air Tight Recessed
Box for Insulated
Ceiling with
90mm Hole



Accessories - Accessoires - Accesorios

MQC003


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
90mm
(3.54")

MQC003.BMK

Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
80mm
(3.14")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

