


# RAÛL 10 TRIMLESS

design: Lapo Grassellini




**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>i</sub> 18V)**

**Power**  
Puissance  
Potencia  
**10W**

FLEXALIGHTING  
NORTH AMERICA



## Photometric diagrams

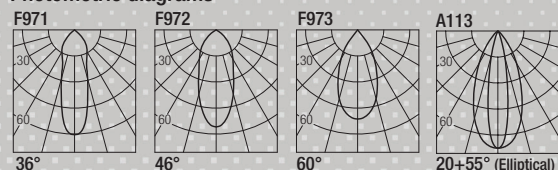

| CCT   | Flux    | CRI |
|-------|---------|-----|
| 2400K | 837 lm  | 95+ |
| 2700K | 921 lm  | 98+ |
| 3000K | 977 lm  | 98+ |
| 3500K | 1016 lm | 98+ |
| 4000K | 1055 lm | 98+ |

| CCT                          | Flux   | CRI |
|------------------------------|--------|-----|
| Dim to Warm<br>1800K-3000K   | 725 lm | 95  |
| Tunable White<br>2700K-5000K | 952 lm | 95  |

## Code Construction

Construction du code produit  
Construcción del código de producto

RT1 X XX 9 X


| RT1 | X | Finishing<br>Finitions<br>Acabados         | XX | Color Temp.<br>Température couleur<br>Temperatura de color | 9 | X | Beam angle<br>Angle de faisceau<br>Ángulo del haz |
|-----|---|--------------------------------------------|----|------------------------------------------------------------|---|---|---------------------------------------------------|
|     |   | 1 White<br>Blanc<br>Blanco                 |    | 24 2400K                                                   |   |   | S 36°                                             |
|     |   | 5 Black<br>Noir<br>Negro                   |    | 27 2700K                                                   |   |   | M 46°                                             |
|     |   | C Custom<br>Personnalisée<br>Personalizado |    | 30 3000K                                                   |   |   | W 60°                                             |
|     |   |                                            |    | 35 3500K                                                   |   |   | D 20+55°<br>(Elliptical)                          |
|     |   |                                            |    | 40 4000K                                                   |   |   |                                                   |
|     |   |                                            |    | DW Dim Warm                                                |   |   |                                                   |
|     |   |                                            |    | TW Tunable White                                           |   |   |                                                   |
|     |   |                                            |    | CU Custom<br>Personnalisée<br>Personalizado                |   |   |                                                   |

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

| Static White<br>500mA   | Phase / 0-10V (Dual Dimming)                 |
|-------------------------|----------------------------------------------|
|                         | CCPR010-A<br>Min. 1<br>Max. 1                |
|                         | CCPR040-A<br>Min. 1<br>Max. 3                |
| Dim to Warm<br>400mA    | Phase / 0-10V (Dual Dimming)                 |
|                         | CCPR010-A<br>Min. 1<br>Max. 1                |
|                         | CCPR040-A<br>Min. 1<br>Max. 3                |
| Turnable White<br>500mA | Please consult factory for<br>driver options |

**Low luminance louvre**  
Filtre basse luminance  
Filtro de baja luminancia


**LOH1**  
White  
Blanc  
Blanco

**LOH1B**  
Black  
Noir  
Negro

**LOH1C**  
Custom  
Personnalisée  
Personalizado




**MP-R090**  
Mounting Plate  
with 90mm Hole



## T-Bar Installation


**R01090**  
Mounting Plate  
with 90mm Hole

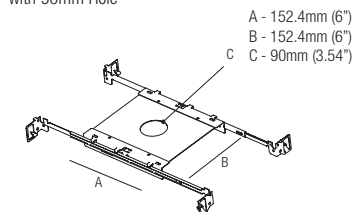

## IC Housings

**IC064R01090**  
Recessed Box for  
Insulated Ceiling  
with 90mm Hole


**AT064R01090**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
90mm Hole



## Accessories - Accessoires - Accesorios

### MQC003


**Plasterboard  
recessing frame**  
Boîtier d'encastrement  
pour plaques de plâtre  
Cajetín para placas de yeso



Hole Cut:  
90mm  
(3.54")

### MQC003.BMK

**Backmount frame**  
Pierre/bois montage arrière  
Roca/madera montaje trasero



Hole Cut:  
79mm  
(3.11")

## Optionals - Accessoires - Accesorios

### DCVI.B.1

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W

