


RAUL 10 UGR

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Pouissance
Potencia
10W

FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

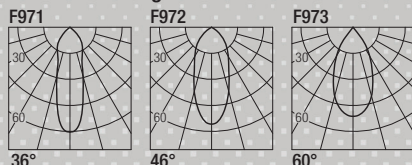

CCT	Flux	CRI
2400K	837 lm	
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

RU1 | X | XX | 9 | X


RU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K		S	36°
				27 2700K		M	46°
		5 Black Noir Negro		30 3000K		W	60°
				35 3500K		D	20+55° (Elliptical)
		C Custom Personnalisée Personalizado		40 4000K			
				DW Dim Warm			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia



LOH1

White
Blanc
Blanco


LOH1B

Black
Noir
Negro

LOH1G


Grey
Gris

MP-R080
Mounting Plate
with 80mm Hole



T-Bar Installation

R01080
Mounting Plate
with 80mm Hole

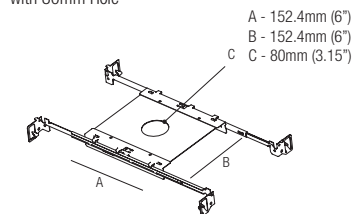


IC Housings

IC086R02080

Recessed Box for
Insulated Ceiling
with 90mm Hole

AT086R02080

Air Tight Recessed
Box for Insulated
Ceiling with
90mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

