



# SELENE

design: Roberto Mantovani




**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V, 2.9V)**

**Power**  
 Puissance  
 Potencia  
**1.5W**

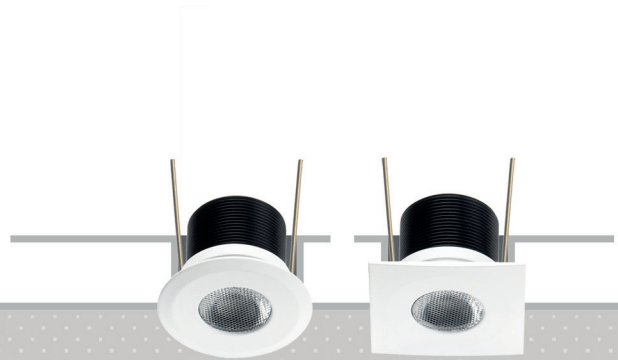

## Photometric diagrams

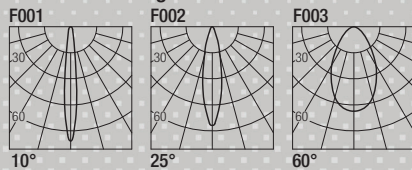

| CCT   | Flux   | CRI |
|-------|--------|-----|
| 2700K | 128 lm | 93  |
| 3000K | 133 lm | 93  |
| 3500K | 143 lm | 93  |
| 4000K | 154 lm | 93  |

## Code Construction

Construction du code produit  
 Construcción del código de producto

SP | X | X | X | XX


| SP | X | Shape<br>Forma<br>Forme     | X | Finishing<br>Finitions<br>Acabados | X | Beam angle<br>Angle de faisceau<br>Ángulo del haz | XX | Color Temp.<br>Température couleur<br>Temperatura de color |
|----|---|-----------------------------|---|------------------------------------|---|---------------------------------------------------|----|------------------------------------------------------------|
|    | 1 | Round<br>Rond<br>Redondo    | 1 | White<br>Blanc<br>Blanco           | 0 | 10°                                               | 27 | 2700K                                                      |
|    | 2 | Square<br>Carré<br>Cuadrado | 2 | Aluminum<br>Aluminium<br>Aluminio  | 1 | 25°                                               | 30 | 3000K                                                      |
|    |   |                             | 3 | Chrome<br>Cromo                    | 2 | 60°                                               | 35 | 3500K                                                      |
|    |   |                             | 4 | Gold<br>Or<br>Oro                  | 9 |                                                   | 40 | 4000K                                                      |
|    |   |                             |   |                                    | C |                                                   | CU | Custom<br>Personnalisée<br>Personalizado                   |
|    |   |                             |   |                                    | 5 |                                                   |    |                                                            |
|    |   |                             |   |                                    | 6 |                                                   |    |                                                            |
|    |   |                             |   |                                    |   |                                                   |    |                                                            |

## Optionals

Accessoires  
 Accesorios


### CS1001

**Recessing box**  
 Boîtier d'encastrement  
 Caja de empotrar




### CS1006

**Recessing box**  
 Boîtier d'encastrement  
 Caja de empotrar




**MP-R030**  
 Mounting Plate  
 with 30mm Hole



## T-Bar Installation


**R01030**  
 Mounting Plate  
 with 30mm Hole

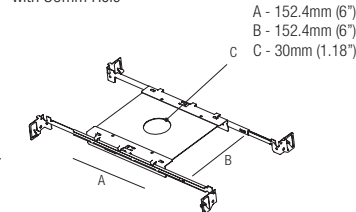

## IC Housings

**IC064R01030**  
 Recessed Box for  
 Insulated Ceiling  
 with 30mm Hole

**AT064R01030**  
 Air Tight Recessed  
 Box for Insulated  
 Ceiling with  
 30mm Hole




## Drivers (Remote)

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



For other driver options -  
 including Lutron, Dali and DMX -  
 please consult factory

Static White  
 500mA

Phase / 0-10V (Dual Dimming)

CCPRO10-A  
 Min. 1  
 Max. 6

CCPRO40-A  
 Min. 1  
 Max. 18