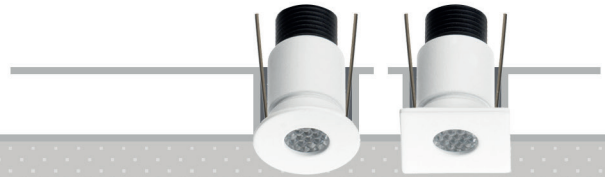




SKY


design: Roberto Mantovani

Supply currentCourant d'alimentation
Corriente de alimentación
250mA (V_i 2.9V)**Power**Pouissance
Potencia
0.75W**Photometric diagrams**



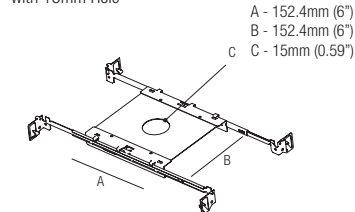
CCT	Flux	CRI
2700K	81 lm	93
3000K	81 lm	93
3500K	100 lm	93
4200K	107 lm	93

Code ConstructionConstruction du code produit
Construcción del código de producto**SK|X|X|X|XX|**

SK	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 Round Rond Redondo		1 White Blanc Blanco		1 20°		27 2700K
		2 Square Carré Cuadrado		2 Aluminium Aluminium Aluminio		2 40°		30 3000K
				3 Chrome Cromo				35 3500K
				4 Gold Or Oro				42 4200K
				5 Black Noir Negro				CU Custom Personnalisée Personalizado
				6 Bronze Bronce				
				C Custom Personnalisée Personalizado				

Drivers (Remote)Alimentateurs
Alimentadores**Series wiring**Câblage en série
Cableado en serieFor other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 12
	CCPR040-A Min. 1 Max. 18

Optionals - Accessoires - Accesorios**CS1008****Recessing box**
Boîtier d'encastrement
Caja de empotrar**MP-R015**Mounting Plate
with 15mm Hole**T-Bar Installation****R01015**Mounting Plate
with 15mm Hole**IC Housings****IC064R01015**Recessed Box for
Insulated Ceiling
with 15mm Hole**AT064R01015**Air Tight Recessed
Box for Insulated
Ceiling with
15mm Hole