


SOREL

design: Roberto Mantovani




Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 2.9V)


Power
 Pouissance
 Potencia
1.5W



Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
4000K	154 lm	93

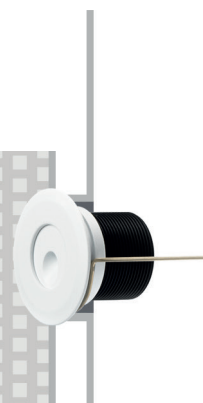

Code Construction

Construction du code produit
 Construcción del código de producto

NP1 X 0 XX


NP1	X	Finishing Finitions Acabados	0	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco			27 2700K
		2 Aluminum Aluminium Aluminio			30 3000K
		3 Chrome Cromo			40 4000K
		4 Gold Or Oro			CU Custom Personnalisée Personalizado
		5 Black Noir Negro			
		6 Bronze Bronce			
		9 INOX AISI 316L Steel Acier Acero			
		C Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie




For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO10-A Min. 1 Max. 6 CCPRO40-A Min. 1 Max. 18

Optionals - Accessoires - Accesorios


CS1001

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



CS1006

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



CS1006.CPW

Concrete pour
 Coulée de béton
 Vertido de hormigón

