


TIO TRIMLESS

design: Roberto Mantovani


Supply current
 Courant d'alimentation
 Corriente de alimentación
24VDC

Power
 Pouissance
 Potencia
7.5W

FLEXALIGHTING
 NORTH AMERICA



Photometric diagrams

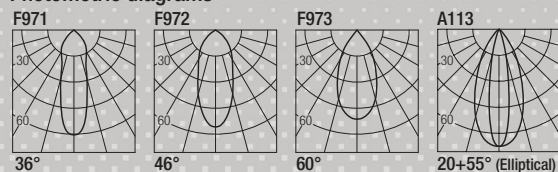

CCT	Flux	CRI
2400K	560 lm	95+
2700K	580 lm	98+
3000K	610 lm	98+
3500K	625 lm	98+
4000K	640 lm	98+

Code Construction

Construction du code produit
 Construcción del código de producto

TT1 | X | XX | 9 | X |


TT1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			S 36°
		5 Black Noir Negro		27 2700K			M 46°
		C Custom Personnalisée Personalizado		30 3000K			W 60°
				35 3500K			D 20+55° (Elliptical)
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Parallel wiring

Câblage en parallèle
 Cableado en paralelo



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White

0-10V/Phase

DLM.100
 Min. 1
 Max. 12
 DLM.60
 Min. 1
 Max. 7
 DLM.30
 Min. 1
 Max. 3

L001

Low luminance louvre


Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
 Note: le filtre doit être commandé en même temps que l'appareil
 Nota: el filtro debe pedirse junto con la luminaria

MP-R090


Mounting Plate
 with 90mm Hole



T-Bar Installation

R01090

Mounting Plate
 with 90mm Hole

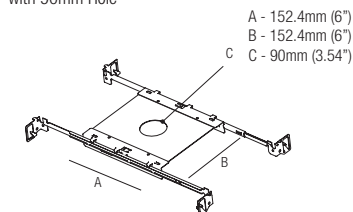


IC Housings

IC064R01090

Recessed Box for
 Insulated Ceiling
 with 90mm Hole

AT064R01090

Air Tight Recessed
 Box for Insulated
 Ceiling with
 90mm Hole




Accessories - Accessoires - Accesorios

MQC003

Plasterboard recessing frame

Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso




Hole Cut:
 90mm
 (3.54")

MQC003.BMK

Backmount frame

Pierre/bois montage arrière
 Roca/madera montaje trasero



Hole Cut:
 79mm
 (3.11")