




IP RATED DOWNLIGHTS

TYZAN

design: Roberto Mantovani


Supply current
 Courant d'alimentation
 Corriente de alimentación
350mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1W



FLEXALIGHTING

NORTH AMERICA

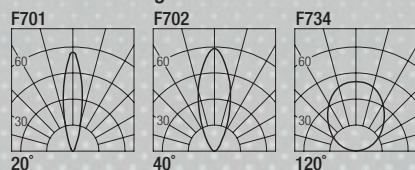**Photometric diagrams**

CCT	Flux	CRI
2700K	81 lm	93
3000K	81 lm	93
3500K	100 lm	93
4000K	107 lm	93

Code Construction

Construction du code produit
 Construcción del código de producto

TZ | X | XX | X


TZ	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados
	1	20°		27	2700K	B White Blanc Blanco
	2	40°		30	3000K	
	9	120°		35	3500K	N Black Noir Negro
				40	4000K	
				CU	Custom Personnalisée Personalizado	C Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring


Câblage en série
 Cableado en serie




For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
350mA	CCPRO10-A Min. 1 Max. 9	CCPRO40-A Min. 1 Max. 18

MP-R045
 Mounting Plate
 with 45mm Hole


**T-Bar Installation**

R01045
 Mounting Plate
 with 45mm Hole

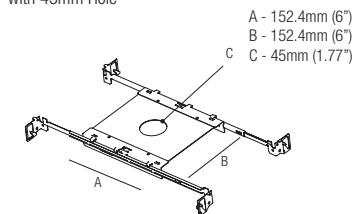
**IC Housings**

IC064R01045
 Recessed Box for
 Insulated Ceiling
 with 45mm Hole

AT064R01045
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 45mm Hole

**Accessories - Accessoires - Accesorios****ZQC001**


**Plasterboard
 recessing frame**
 Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso



Hole Cut:
45mm
 (1.77")

ZQC001.BMK

Backmount frame
 Pierre/bois montage arrière
 Roca/madera montaje trasero



Hole Cut:
34mm
 (1.34")