




IP RATED DOWNLIGHTS

VENUS

design: Roberto Mantovani



Supply current
Courant d'alimentation
Corriente de alimentación
24VDC


Power
Puissance
Potencia
7.5W



FLEXALIGHTING
NORTH AMERICA



Photometric diagrams

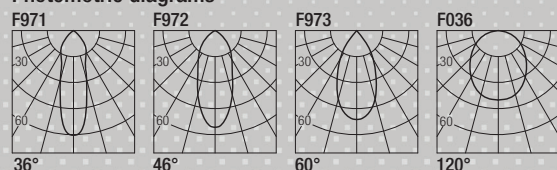

CCT	Flux	CRI
2400K	560 lm	95+
2700K	580 lm	98+
3000K	610 lm	98+
3500K	625 lm	98+
4000K	640 lm	98+

Code Construction

Construction du code produit
Construcción del código de producto

VN1 | XX | 9 | X | X


VN1	XX	Color Temp. Température couleur Temperatura de color	9	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz
		24 2400K			B White Blanc Blanco	S 36°	
		27 2700K				M 46°	
		30 3000K			N Black Noir Negro	W 60°	
		35 3500K			K COR-TEN	X 120°	
		40 4000K					
		CU Custom Personnalisée Personalizado			C Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



For other driver options -
including Lutron, Dali and DMX -
please consult factory


Static White

0-10V/Phase

DLM.100
Min. 1
Max. 12
DLM.60
Min. 1
Max. 7
DLM.30
Min. 1
Max. 3

MP-R051


Mounting Plate
with 51mm Hole



T-Bar Installation

R02051

Mounting Plate
with 51mm Hole

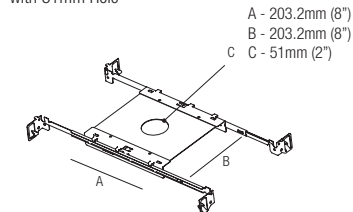


IC Housings

IC086R02051

Recessed Box for
Insulated Ceiling with
51mm Hole

AT086R02051

Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole




Optionals - Accessoires - Accesorios

CSBT10

Recessing box

Boîtier d'encastrement
Caja de empotrar



CSBT10.CPW

Concrete pour
Coulée de béton
Vertido de hormigón

