



WOTAN 5

design: Lapo Grassellini


Supply current
Courant d'alimentation
Corriente de alimentación
250mA (V_f 18V)

Power
Pouissance
Potencia
5W

FLEXALIGHTING
NORTH AMERICA

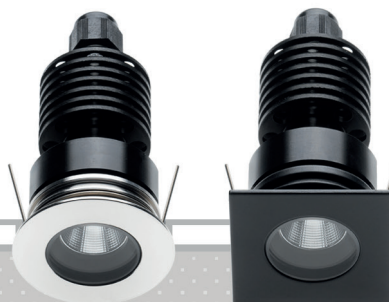

Photometric diagrams

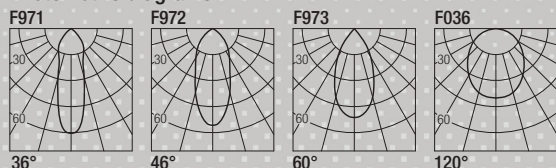

CCT	Flux	CRI
2700K	492 lm	98+
3000K	521 lm	98+
3500K	542 lm	98+
4000K	563 lm	98+

Code Construction

Construction du code produit
Construcción del código de producto

WT5 X XX 9 X X


WT5	X Shape Forma Forme	XX Color Temp. Température couleur Temperatura de color	9	X Finishing Finitions Acabados	X Beam angle Angle de faisceau Ángulo del haz
	1 Round Rond Redondo	24 2400K		B White Blanc Blanco	S 36°
	2 Square Carré Cuadrado	27 2700K		N Black Noir Negro	M 46°
		30 3000K		K COR-TEN	W 60°
		35 3500K		Z INOX AISI 316L Steel Acier Acero	X 120°
		40 4000K		C Custom Personnalisée Personalizado	
		CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
250mA	CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 3

Optionals - Accessoires - Accesorios

CSDS05

Recessing box
Boîtier d'encastrement
Caja de empotrar



L0D5

Low luminance louver
Filtre basse luminace
Filtro de baja luminancia





Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

R01040
Mounting Plate
with 40mm Hole


MP-R040
Mounting Plate
with 40mm Hole



IC Housings

IC064R01040
Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064R01040
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

