


ZERINO


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
250mA (V_f 2.9V)

Power
Puissance
Potencia
0.75W



Photometric diagrams



CCT	Flux	CRI
2700K	81 lm	93
3000K	81 lm	93
3500K	100 lm	93
4200K	107 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

ZK1 | X | X | XX


ZK1	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
	1	White Blanc Blanco	1	20°	27	2700K
	5	Black Noir Negro	2	40°	30	3000K
	C	Custom Personnalisée Personalizado			35	3500K
					42	4200K
					CU	Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 12 CCPR040-A Min. 1 Max. 18

MP-R030


Mounting Plate
with 30mm Hole



T-Bar Installation

R01030

Mounting Plate
with 30mm Hole

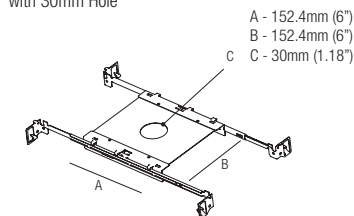


IC Housings

IC064R01030

Recessed Box for
Insulated Ceiling
with 30mm Hole

AT064R01030

Air Tight Recessed
Box for Insulated
Ceiling with
30mm Hole



Accessories - Accessoires - Accesorios

ZQC00K

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso




Hole Cut:
30mm
(1.18")

ZQC00K.BMK

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
23mm
(0.90")