




ZERO Q6

design: Roberto Mantovani

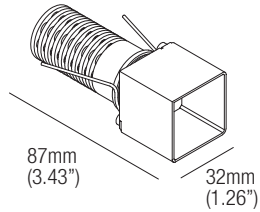


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 8.7V)

Power
 Pouissance
 Potencia
4.5W

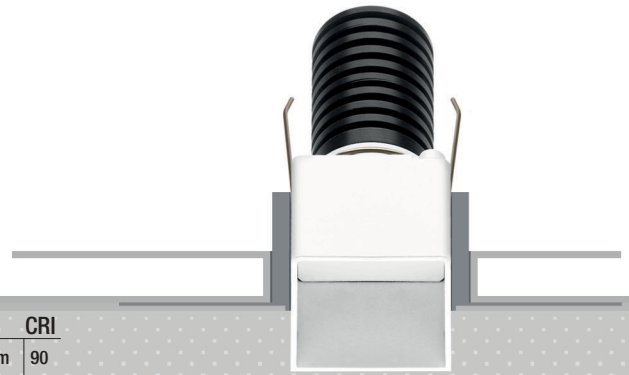

Photometric diagrams

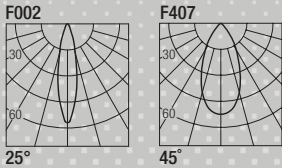

CCT	Flux	CRI	CCT	Flux	CRI
2700K	421 lm	98+	Dim to Warm	416 lm	90
3000K	446 lm	98+	1800K-3000K		
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

ZW2 | X | X | XX | E |


ZW2	X	Finishing	X	Beam angle	XX	Color Temp.	E
		Finitions Acabados		Angle de faisceau Ángulo del haz		Température couleur Temperatura de color	
	1	White Blanc Blanco	1	25°	27	2700K	
	5	Black Noir Negro	2	45°	30	3000K	
	C	Custom Personnalisée Personalizado			35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)



Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

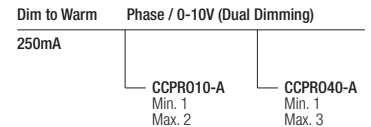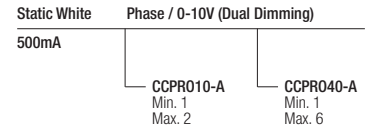

L001

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

Accessories - Accessoires - Accesorios

ZQC002


Plasterboard recessing frame
 Boîtier d'encastrement pour plaques de plâtre
 Cajetín para placas de yeso



Hole Cut:
35mm
(1.38")

MP-Q040


Mounting Plate
 with 40mm Hole

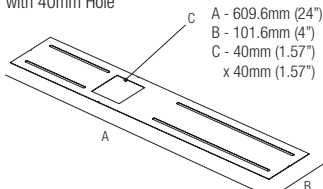

T-Bar Installation

Q01040

Mounting Plate
 with 40mm Hole

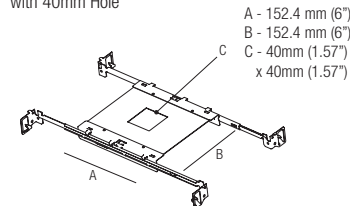


IC Housings

IC064Q01040

Recessed Box for Insulated Ceiling with 40mm Hole

AT064Q01040

Air Tight Recessed Box for Insulated Ceiling with 40mm Hole

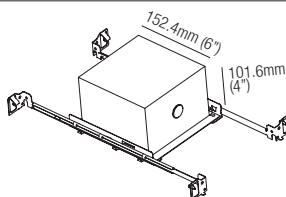

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

