



TRIMLESS DOWNLIGHTS



ZERO R10

design: J. Allen


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Puissance
Potencia
10W

FLEXALIGHTING
NORTH AMERICA

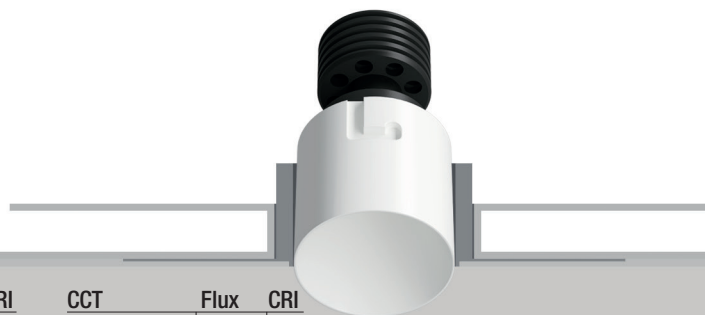

Photometric diagrams

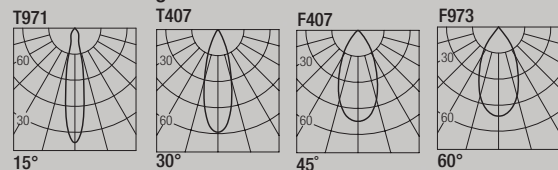

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

ZR1 X XX 9 X


ZR1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			1 15°
		5 Black Noir Negro		27 2700K			2 30°
		C Custom Personnalisée Personalizado		30 3000K			3 45°
				35 3500K			4 60°
				40 4000K			
				DW Dim Warm			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Turnable White	
500mA	Please consult factory for driver options


L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R060
Mounting Plate
with 60mm Hole



T-Bar Installation


R01060
Mounting Plate
with 60mm Hole

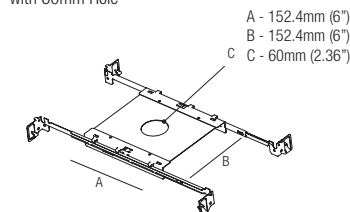

IC Housings

IC064R01060
Recessed Box for
Insulated Ceiling
with 60mm Hole


AT064R01060
Air Tight Recessed
Box for Insulated
Ceiling with
60mm Hole



Accessories - Accessoires - Accesorios

ZQC005


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
60mm
(2.36")

ZQC005.BMK

Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
55mm
(2.16")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

