




IP RATED DOWNLIGHTS

ZERUS 6

design: Roberto Mantovani




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)


Power
Puissance
Potencia
4.5W



FLEXALIGHTING
NORTH AMERICA

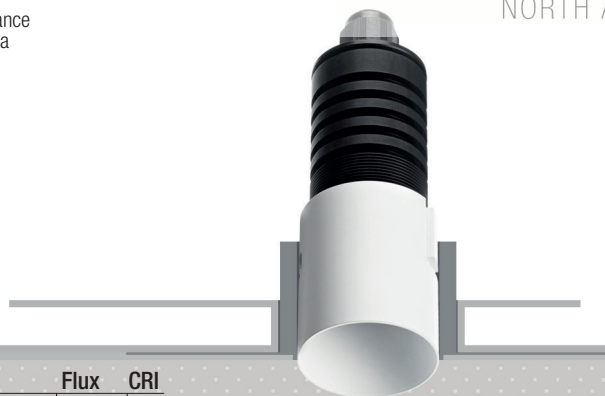

Photometric diagrams



CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	416 lm	90

Code Construction

Construction du code produit
Construcción del código de producto

ZT2|X|XX|X|E|


ZT2	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados	E
	1	25°		24		B	
	2	45°		27		N	
				30		C	
				35			
				40			
				DW			
				CU			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)
250mA	CCPR010-A Min. 1 Max. 2
	CCPR040-A Min. 1 Max. 3

L001

Low luminance louvre


Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminaria

MP-R051


Mounting Plate
with 51mm Hole



T-Bar Installation

R02051

Mounting Plate
with 51mm Hole

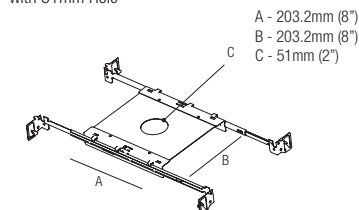


IC Housings

IC086R02051

Recessed Box for
Insulated Ceiling with
51mm Hole

AT086R02051

Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole




Accessories - Accessoires - Accesorios

ZQT00U

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso




Hole Cut:
51mm
(2")

ZQT00U.BMK

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
42mm
(1.65")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

