




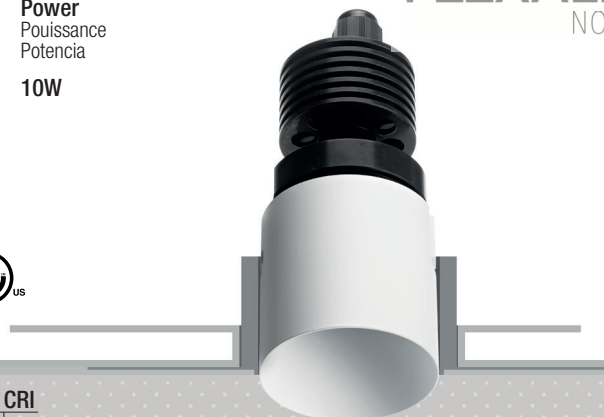
IP RATED DOWNLIGHTS

ZETAN 10

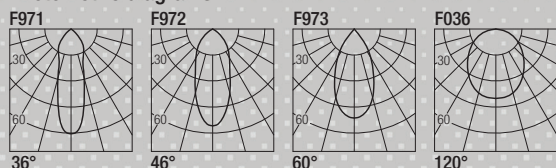
design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación500mA (V_f 18V)Power
Puissance
Potencia

10W

FLEXALIGHTING
NORTH AMERICA

Photometric diagrams



CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	

Code Construction

Construction du code produit
Construcción del código de producto


ZN1 XX 9 X X

ZN1	XX	Color Temp. Température couleur Temperatura de color	9	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz
		24 2400K			B White Blanc Blanco		S 36°
		27 2700K			N Black Noir Negro		M 46°
		30 3000K			C Custom Personnalisée Personalizado		W 60°
		35 3500K					X 120°
		40 4000K					
		DW Dim Warm					
		CU Custom Personnalisée Personalizado					

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring


Câblage en série
Cableado en serieFor other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3

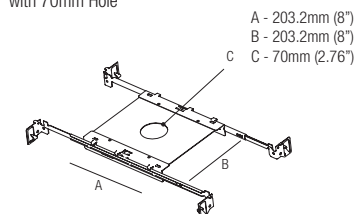
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3

L0D1


Low luminance louvre

Filtre basse luminance
Filtro de baja luminanciaNote: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Note: el filtro debe pedirse junto con la luminariaMP-R070
Mounting Plate
with 70mm Hole

T-Bar Installation

R02070
Mounting Plate
with 70mm Hole


IC Housings

IC086R02070
Recessed Box for
Insulated Ceiling with
70mm HoleAT086R02070
Air Tight Recessed
Box for Insulated
Ceiling with
70mm Hole

Accessories - Accessoires - Accesorios


ZTC10U

Plasterboard recessing frame

Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yesoHole Cut:
70mm (2.76")

ZTC10U.BMK

Backmount frame

Pierre/bois montage arrière
Roca/madera montaje traseroHole Cut:
59mm (2.32")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W