

# DAVID 72

design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación


24VDC

**Power**  
Puissance  
Potencia

20W

**FLEXALIGHTING**  
NORTH AMERICA


160mm (6.29")



50mm (1.96")



## Photometric diagrams

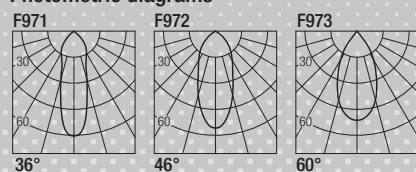

| CCT   | Flux    | CRI |
|-------|---------|-----|
| 2700K | 1659 lm | 93  |
| 3000K | 1752 lm | 93  |
| 3500K | 1873 lm | 93  |
| 4000K | 1925 lm | 93  |



## Code Construction

Construction du code produit  
Construcción del código de producto

DA72 | XX | 9 | X |


| DA72 | XX | Color Temp.<br>Température couleur<br>Temperatura de color | 9 | X | Beam angle<br>Angle de faisceau<br>Ángulo del haz |
|------|----|------------------------------------------------------------|---|---|---------------------------------------------------|
|      |    | 27 2700K                                                   |   |   | S 36°                                             |
|      |    | 30 3000K                                                   |   |   | M 46°                                             |
|      |    | 35 3500K                                                   |   |   | W 60°                                             |
|      |    | 40 4000K                                                   |   |   |                                                   |
|      |    | CU Custom<br>Personnalisée<br>Personalizado                |   |   |                                                   |

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Parallel wiring

Câblage en parallèle  
Cableado en paralelo



| Static White | 0-10V/Phase                 |
|--------------|-----------------------------|
|              | CV2496A<br>Min. 1<br>Max. 4 |

## L001

### Low luminance louver

Filtre basse luminance  
Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria