


NONE R2


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W



Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	90+
3000K	133 lm	90+
3500K	142 lm	90+
4000K	154 lm	85
Custom	TBD	

Code Construction

Construction du code produit
 Construcción del código de producto

NRS X XX 5


NRS	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	5
		1 White Blanc Blanco		27 2700K	
		5 Black Noir Negro		30 3000K	
				35 3500K	
				40 4000K	
				CU Custom	

Drivers

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.01%
Min 1./Max. 18 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
 Dimming Range: 10%
Min. 2/Max. 7 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
 Dimming Range: 10%
Min 7./Max. 14 Fixtures per Driver

Lutron Forward Phase

LTEA.1

Hi-Lume Forward Phase
 20W 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 12 Fixtures per Driver

LTEA.2

Hi-Lume Forward Phase
 30W 500mA Constant Current
 Dimming Range: 1%
Min. 12/Max. 18 Fixtures per Driver


Lutron Ecosystem

PEQ.1

Hi-Lume ECO System
 20W 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 12 Fixtures per Driver

PEQ.0

Hi-Lume ECO System Premier
 20W 500mA Constant Current
 Dimming Range: 0.1%
Min. 3/Max. 12 Fixtures per Driver

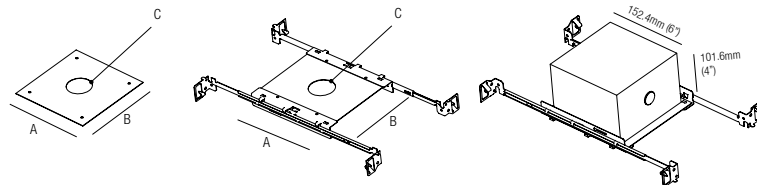

R01045-W0A
 Mounting Plate
 with 45mm Hole

A - 152.4mm (6")
 B - 152.4mm (6")
 C - 45mm (1.77")

R01045
 Mounting Plate
 with 45mm Hole

A - 152.4mm (6")
 B - 152.4mm (6")
 C - 45mm (1.77")

IC064R01045
 Recessed Box for Insulated Ceiling
 with 45mm Hole

AT064R01045
 Air Tight Recessed Box for Insulated
 Ceiling with 45mm Hole

Optionals - Accessoires - Accesorios

Plasterboard recessing frame

Boîtier d'encastrement pour plaques de plâtre
 Cajetín para placas de yeso



ZQC001
 White
 Blanc
 Blanco

ZQC001B
 Black
 Noir
 Negro