


MOON QX130


design: Lapo Grassellini

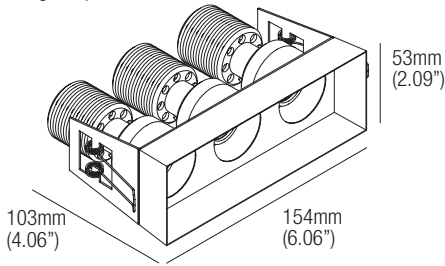


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 3 x 18V)

Power
 Pouissance
 Potencia
3 x 10W

FLEXALIGHTING
 NORTH AMERICA



Photometric diagrams

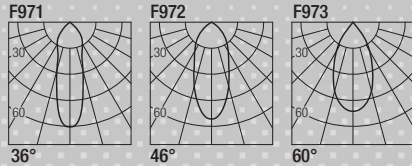

CCT	Flux _(x3)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

MQX13 | X | XX | 9 | X


MQX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado			S 36° M 46° W 60°

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPR010-A x3 Min. 1 Max. 1 CCPR040-A Min. 1 Max. 1
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	CCPR010-A x3 Min. 1 Max. 1 CCPR040-A Min. 1 Max. 1
Turnable White	
500mA	Please consult factory for driver options

Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia

3 x LOH1	3 x LOH1B	3 x LOH1C
White Blanc Blanco	Black Noir Negro	Custom Personnalisée Personalizado




Accessories - Accessoires - Accesorios

MQX13Q.BMK

Plasterboard recessing frame

Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso




Hole Cut:
 57mm x 161mm
 (2.24" x 6.34")

MQX13Q.WF

Backmount frame

Pierre/bois montage arrière
 Roca/madera montaje trasero




Hole Cut:
 57mm x 161mm
 (2.24" x 6.34")

Optionals - Accessoires - Accesorios


3 x DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W



MP-X161


Mounting Plate
 with 161x57mm Hole



T-Bar Installation

X03161

Mounting Plate
 with 161x57mm Hole

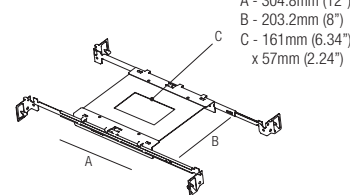

IC Housings

IC127X03161

Recessed Box for
 Insulated Ceiling
 with 161x57mm Hole

AT127X03161

Air Tight Recessed
 Box for Insulated
 Ceiling with
 161x57mm Hole

